
Heavy duty wheel 160 mm, polyurethane, ball bearing, axle hole 20 mm, 600 kg, product code 17840

Heavy duty wheel with polyurethane tread, wheel diameter 160 mm, on ball bearing. It carries 600 kg dynamic and 750 kg static, with a 20 mm axle hole.

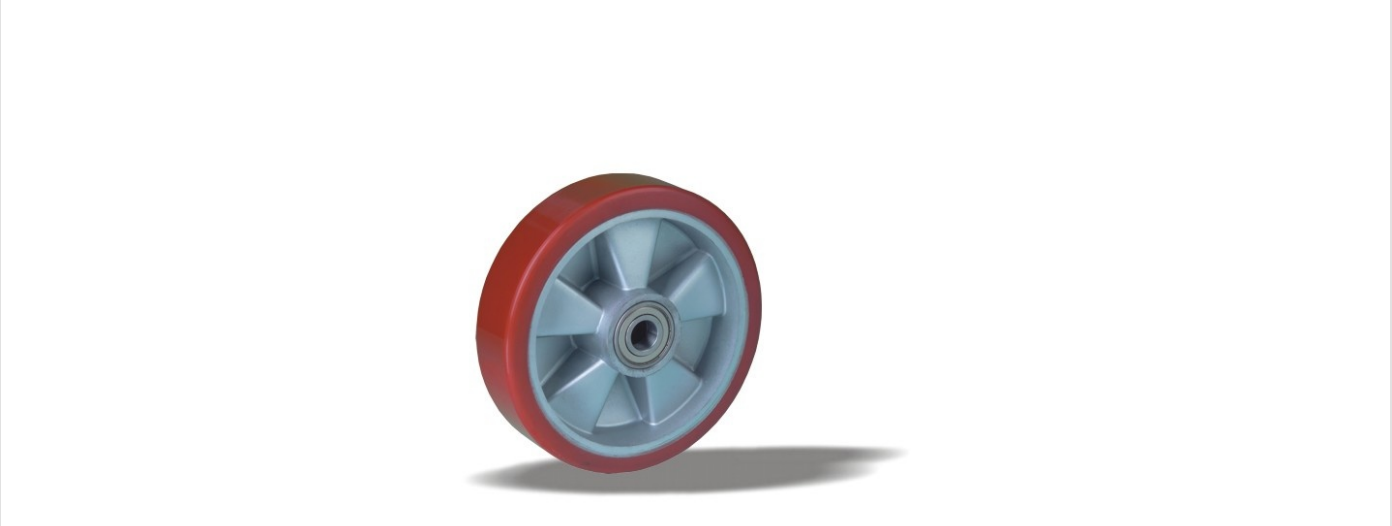

Drawing number **2-120-32K** | Product code **17840** | EAN **3838461178405**

Type	Heavy duty wheel
Wheel diameter	160 mm
Wheel width	50 mm
Tread	polyurethane tread, 92 Shore A
Tread colour	orange/red/brown
Wheel centre	aluminium
Bearing	ball bearing
Load capacity, dynamic	600 kg
Load capacity, static	750 kg
Axle hole	20 mm
Weight	1.1 kg
Temperature, continuous	-25 to +55 °C
Temperature, short exposure (max. 10 min)	-40 to +55 °C
Fitting	Wheel hub
Tread material	Injection-moulded polyurethane

Properties and use

Low own weight and chemical resistance. Heavy loads move with little effort. On request: other wheel and tyre colours, and an electrically conductive or antistatic tyre (ESD).

Send us the drawing or the dimensions of the castor you are replacing and we confirm the match. Quote within 1 to 2 working days.

Specifications from the LIV product database, October 2026.