
# Fixed transport castor 225 mm, black rubber, plain bearing, plate 175x140 mm, 250 kg, product code 22793

Fixed transport castor with black rubber tread, wheel diameter 225 mm, on plain bearing. It carries 250 kg dynamic and 310 kg static, mounted on a 175x140 mm top plate with hole distance 140x105 mm.



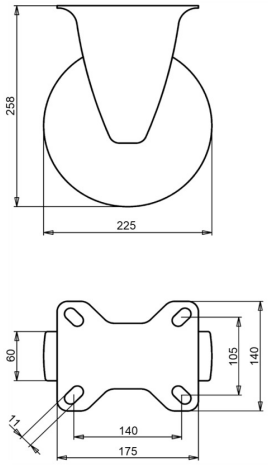


Drawing number **2-312 ISO** | Product code **22793** | EAN **3838461227936**

| | |
|---|---|
| **Type** | Fixed transport castor |
| **Wheel diameter** | 225 mm |
| **Wheel width** | 60 mm |
| **Tread** | black rubber tread, 80 Shore A |
| **Tread colour** | black |
| **Wheel centre** | steel, zinc electroplated, Cr(VI)-free |
| **Bearing** | plain bearing |
| **Load capacity, dynamic** | 250 kg |
| **Load capacity, static** | 310 kg |
| **Top plate** | 175x140 mm |
| **Hole distance** | 140x105 mm |
| **Fixing hole diameter** | 11 mm |
| **Overall height** | 258 mm |
| **Weight** | 4.3 kg |
| **Temperature, continuous** | -20 to +70 °C |
| **Temperature, short exposure (max. 10 min)** | -30 to +80 °C |

Fork zinc electroplated and Cr(VI)-free. Tread free of PAH (EU directive 2005/69/EC). Tested to EN 12532.

## Properties and use

Steers easily and copes with uneven floors and obstacles. Steel rim and rubber tyre make a strong wheel. On request: other wheel and tyre colours, and an electrically conductive or antistatic tyre (ESD).

Send us the drawing or the dimensions of the castor you are replacing and we confirm the match. Quote within 1 to 2 working days.

Specifications from the LIV product database, October 2026.