
Swivel castor with total lock 150 mm, polypropylene, plain bearing, plate 135x110 mm, 250 kg, product code 30673, wheel centre white

Swivel castor with total lock, 150 mm wheel diameter, solid polypropylene wheel, running on plain bearing. Rated load is 250 kg dynamic, 310 kg static, mounted on a 135x110 mm top plate with hole distance 105x80 mm. The total lock brakes the rotation of the wheel and the swivel head.



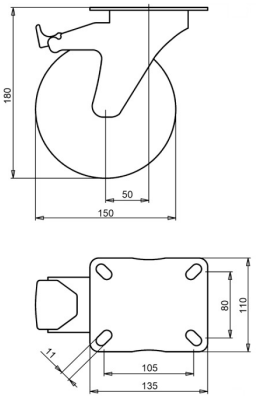

Drawing number **2-685 A** | Product code **30673** | EAN **3838461306730**

Type	Swivel castor with total lock
Wheel diameter	150 mm
Wheel width	46 mm
Tread	solid polypropylene wheel, 60±5 Shore D
Wheel centre	polypropylene
Bearing	plain bearing
Load capacity, dynamic	250 kg
Load capacity, static	310 kg
Top plate	135x110 mm
Hole distance	105x80 mm
Fixing hole diameter	11 mm
Overall height	180 mm
Offset	50 mm
Brake	total lock (locks wheel and swivel)
Weight	1.6 kg
Temperature, continuous	-20 to +60 °C
Tread hardness	60 Shore D

Fork zinc electroplated and Cr(VI)-free.

Properties and use

Polypropylene resists acids, wears slowly and rolls with low resistance. On request: other wheel and tyre colours, and an electrically conductive or antistatic tyre (ESD).

Send us the drawing or the dimensions of the castor you are replacing and we confirm the match. Quote within 1 to 2 working days.

Specifications from the LIV product database, October 2026.