
Swivel castor 220 mm, pneumatic tyre, plain bearing, plate 175x140 mm, 150 kg, product code 31853

Swivel castor with black pneumatic tyre, wheel diameter 220 mm, on plain bearing. It carries 150 kg dynamic and 180 kg static, mounted on a 175x140 mm top plate with hole distance 140x105 mm.



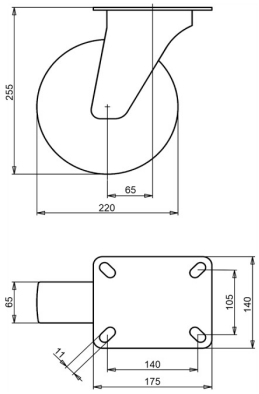

Drawing number **2-263 ISO** | Product code **31853** | EAN **3838461318535**

Type	Swivel castor
Wheel diameter	220 mm
Wheel width	65 mm
Tread	black pneumatic tyre
Wheel centre	polypropylene
Bearing	plain bearing
Load capacity, dynamic	150 kg
Load capacity, static	180 kg
Top plate	175x140 mm
Hole distance	140x105 mm
Fixing hole diameter	11 mm
Overall height	255 mm
Offset	65 mm
Weight	3.25 kg
Temperature, continuous	-5 to +60 °C
Temperature, short exposure (max. 10 min)	-5 to +60 °C

Fork zinc electroplated and Cr(VI)-free. Tread free of PAH (EU directive 2005/69/EC).

Properties and use

Rolls over large stones and absorbs shocks. Easy to handle. On request: other wheel and tyre colours, and an electrically conductive or antistatic tyre (ESD).

Send us the drawing or the dimensions of the castor you are replacing and we confirm the match. Quote within 1 to 2 working days.

Specifications from the LIV product database, October 2026.