
Wheel 80 mm, grey rubber, plain bearing, axle hole 12 mm, 65 kg, product code 38863

Wheel, 80 mm wheel diameter, grey rubber tread, running on plain bearing. Rated load is 65 kg dynamic, 80 kg static, with a 12 mm axle hole.

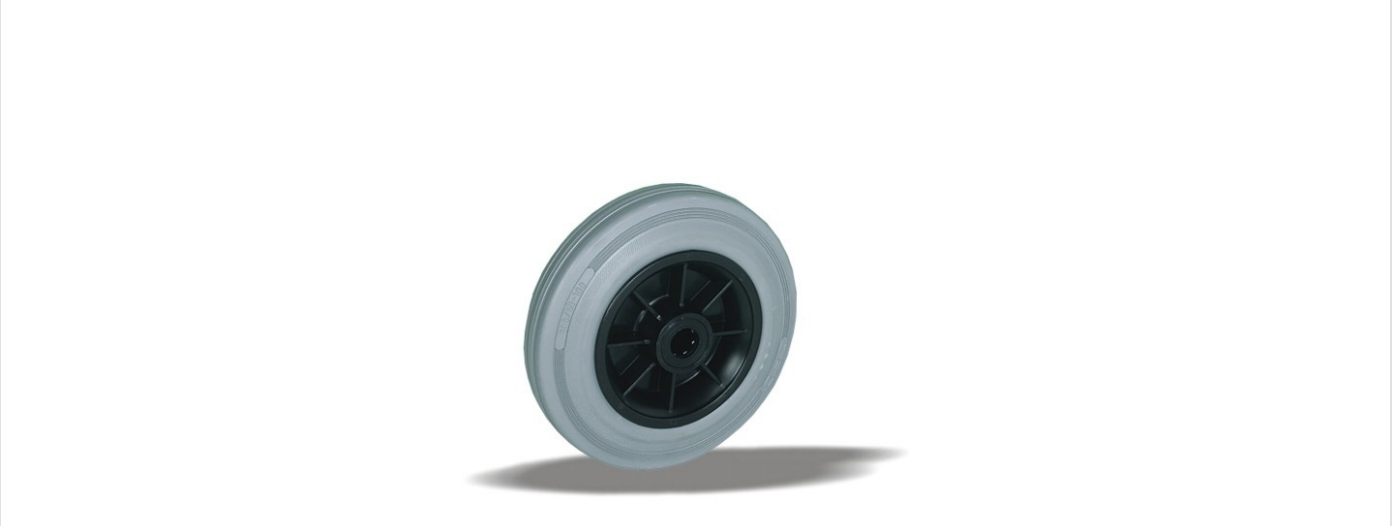

Drawing number **2-942 ISO** | Product code **38863** | EAN **3838461388637**

Type	Wheel
Wheel diameter	80 mm
Wheel width	30 mm
Tread	grey rubber tread, 83 Shore A
Tread colour	grey
Wheel centre	polypropylene
Bearing	plain bearing
Load capacity, dynamic	65 kg
Load capacity, static	80 kg
Axle hole	12 mm
Weight	0.15 kg
Temperature, continuous	-20 to +70 °C
Temperature, short exposure (max. 10 min)	-30 to +80 °C
Fitting	Wheel hub
Hub length	44 mm

Tread free of PAH (EU directive 2005/69/EC). Tested to EN 12532.

Properties and use

The grey rubber does not leave marks on the floor. The tyre damps vibration and noise, and the wheel works indoors and outdoors. On request: other wheel and tyre colours, and an electrically conductive or antistatic tyre (ESD).

Send us the drawing or the dimensions of the castor you are replacing and we confirm the match. Quote within 1 to 2 working days.

Specifications from the LIV product database, October 2026.