
Wheel 150 mm, grey rubber, plain bearing, axle hole 20 mm, 170 kg, product code 39365

Wheel with grey rubber tread, wheel diameter 150 mm, on plain bearing. It carries 170 kg dynamic and 210 kg static, with a 20 mm axle hole.

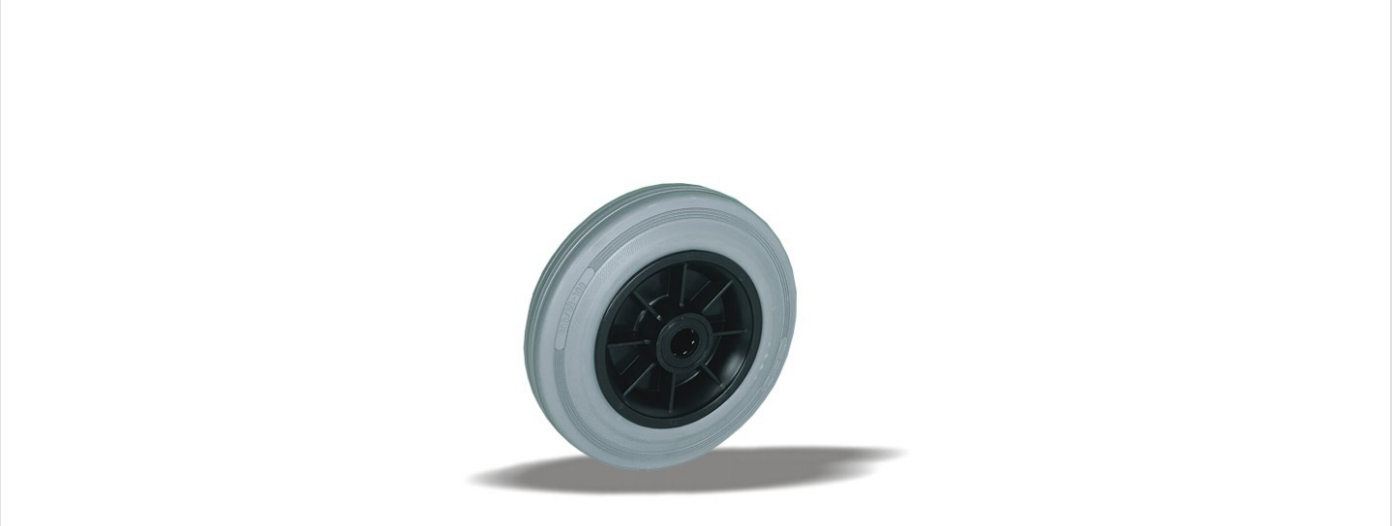

Drawing number **2-945 ISO** | Product code **39365** | EAN **3838461393655**

Type	Wheel
Wheel diameter	150 mm
Wheel width	40 mm
Tread	grey rubber tread, 83 Shore A
Tread colour	grey
Wheel centre	polypropylene
Bearing	plain bearing
Load capacity, dynamic	170 kg
Load capacity, static	210 kg
Axle hole	20 mm
Weight	0.6 kg
Temperature, continuous	-20 to +70 °C
Temperature, short exposure (max. 10 min)	-30 to +80 °C
Fitting	Wheel hub
Hub length	58 mm

Tread free of PAH (EU directive 2005/69/EC). Tested to EN 12532.

Properties and use

The grey rubber does not leave marks on the floor. The tyre damps vibration and noise, and the wheel works indoors and outdoors. On request: other wheel and tyre colours, and an electrically conductive or antistatic tyre (ESD).

Send us the drawing or the dimensions of the castor you are replacing and we confirm the match. Quote within 1 to 2 working days.

Specifications from the LIV product database, October 2026.