
Swivel castor with total lock 150 mm, grey rubber, roller bearing, plate 135x110 mm, 170 kg, product code 39433

Swivel castor with total lock, 150 mm wheel diameter, grey rubber tread, running on roller bearing. Rated load is 170 kg dynamic, 210 kg static, mounted on a 135x110 mm top plate with hole distance 105x110 mm. The total lock brakes the rotation of the wheel and the swivel head.



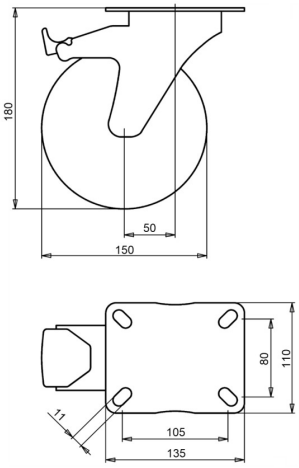

Drawing number **2-931 ISO** | Product code **39433** | EAN **3838461394331**

Type	Swivel castor with total lock
Wheel diameter	150 mm
Wheel width	40 mm
Tread	grey rubber tread, 83 Shore A
Tread colour	grey
Wheel centre	polypropylene
Bearing	roller bearing
Load capacity, dynamic	170 kg
Load capacity, static	210 kg
Top plate	135x110 mm
Hole distance	105x110 mm
Fixing hole diameter	11 mm
Overall height	180 mm
Offset	50 mm
Brake	total lock (locks wheel and swivel)
Weight	1.55 kg
Temperature, continuous	-20 to +70 °C
Temperature, short exposure (max. 10 min)	-30 to +80 °C

Fork zinc electroplated and Cr(VI)-free. Tread free of PAH (EU directive 2005/69/EC). Tested to EN 12532.

Properties and use

The grey rubber does not leave marks on the floor. The tyre damps vibration and noise, and the wheel works indoors and outdoors. On request: other wheel and tyre colours, and an electrically conductive or antistatic tyre (ESD).

Send us the drawing or the dimensions of the castor you are replacing and we confirm the match. Quote within 1 to 2 working days.

Specifications from the LIV product database, October 2026.