
Wheel 200 mm, polyurethane, roller bearing, axle hole 12.5 mm, 500 kg, Art. 2-050-40V

Wheel with polyurethane tread, wheel diameter 200 mm, on roller bearing. It carries 500 kg dynamic and 620 kg static, with a 12.5 mm axle hole.

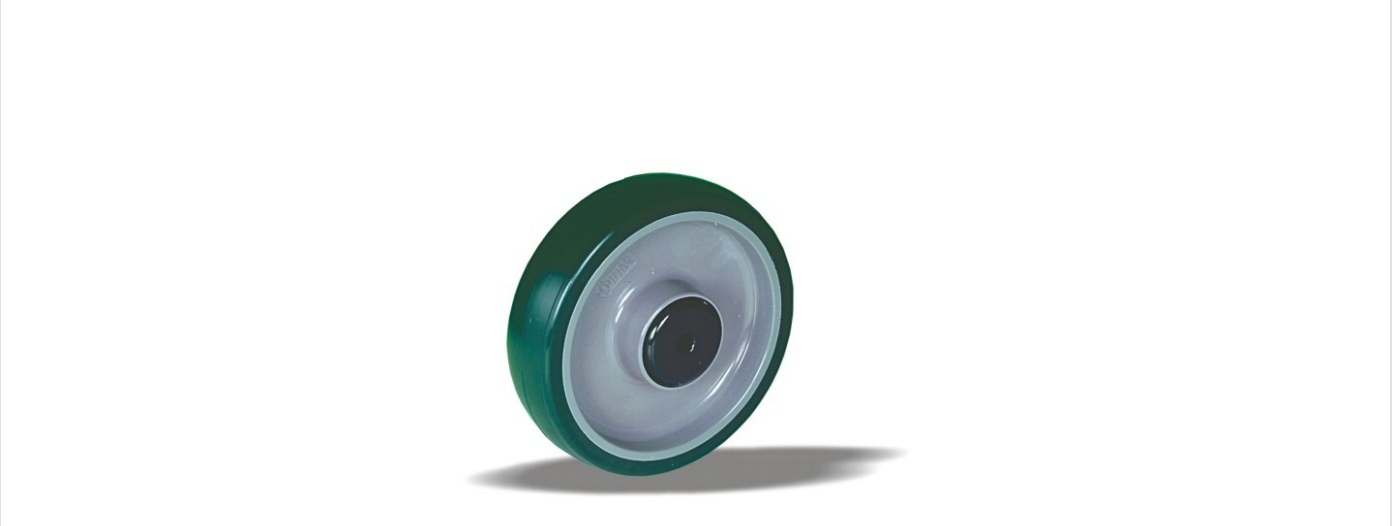

Drawing number **2-050-40V** | SKU **40445** | EAN **3838461404450**

Type	Wheel
Wheel diameter	200 mm
Wheel width	50 mm
Tread	polyurethane tread, 92 Shore A
Tread colour	green
Wheel centre	polyamide
Bearing	roller bearing
Load capacity, dynamic	500 kg
Load capacity, static	620 kg
Axle hole	12.5 mm
Weight	1 kg
Temperature, continuous	-25 to +55 °C
Temperature, short exposure (max. 10 min)	-30 to +55 °C
Fitting	Wheel hub
Hub length	58 mm
Tread material	Injection-moulded polyurethane

Properties and use

The polyurethane tread resists cuts and suits stony floors. It tolerates large temperature differences. On request: other wheel and tyre colours, and an electrically conductive or antistatic tyre (ESD).

Send us the drawing or the dimensions of the castor you are replacing and we confirm the match. Quote within 1 to 2 working days.

Specifications from the LIV product database, October 2026.