
Stainless steel swivel castor with total lock 180 mm, grey rubber, roller bearing, plate 135x110 mm, 200 kg, product code 41903

Stainless steel swivel castor with total lock with grey rubber tread, wheel diameter 180 mm, on roller bearing. It carries 200 kg dynamic and 250 kg static, mounted on a 135x110 mm top plate with hole distance 105x80 mm. The total lock brakes the rotation of the wheel and the swivel head.



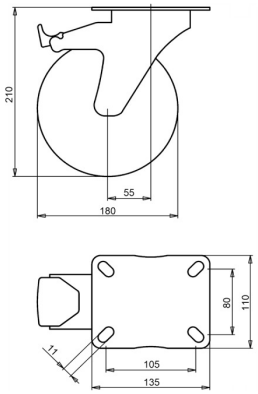

Drawing number **2-933 ISO** | Product code **41903** | EAN **3838461419034**

Type	Stainless steel swivel castor with total lock
Wheel diameter	180 mm
Wheel width	50 mm
Tread	grey rubber tread, 83 Shore A
Tread colour	grey
Wheel centre	polypropylene
Bearing	roller bearing
Load capacity, dynamic	200 kg
Load capacity, static	250 kg
Top plate	135x110 mm
Hole distance	105x80 mm
Fixing hole diameter	11 mm
Overall height	210 mm
Offset	55 mm
Brake	total lock (locks wheel and swivel)
Weight	2.67 kg
Temperature, continuous	-20 to +70 °C
Temperature, short exposure (max. 10 min)	-30 to +80 °C

Tread free of PAH (EU directive 2005/69/EC).

Properties and use

The grey rubber protects the floor. The castor suits wet areas and steam cleaning, and low obstacles pass smoothly. On request: other wheel and tyre colours, and an electrically conductive or antistatic tyre (ESD).

Send us the drawing or the dimensions of the castor you are replacing and we confirm the match. Quote within 1 to 2 working days.

Specifications from the LIV product database, October 2026.