
# Fixed castor 125 mm, polyurethane, ball bearing, plate 105x85 mm, 300 kg, product code 42384

Fixed castor with a 125 mm wheel, polyurethane tread, on ball bearing. It carries 300 kg dynamic and 370 kg static, mounted on a 105x85 mm top plate with hole distance 80x60 mm.



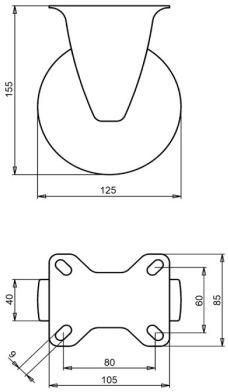


Drawing number **2-121-25K** | Product code **42384** | EAN **3838461423840**

| | |
|---|---|
| **Type** | Fixed castor |
| **Wheel diameter** | 125 mm |
| **Wheel width** | 40 mm |
| **Tread** | polyurethane tread, 92 Shore A |
| **Tread colour** | orange/red/brown |
| **Wheel centre** | aluminium |
| **Bearing** | ball bearing |
| **Load capacity, dynamic** | 300 kg |
| **Load capacity, static** | 370 kg |
| **Top plate** | 105x85 mm |
| **Hole distance** | 80x60 mm |
| **Fixing hole diameter** | 9 mm |
| **Overall height** | 155 mm |
| **Weight** | 1 kg |
| **Temperature, continuous** | -25 to +55 °C |
| **Temperature, short exposure (max. 10 min)** | -40 to +55 °C |
| **Tread material** | Injection-moulded polyurethane |

Fork zinc electroplated and Cr(VI)-free.

## Properties and use

Low own weight and chemical resistance. Heavy loads move with little effort. On request: other wheel and tyre colours, and an electrically conductive or antistatic tyre (ESD).

Send us the drawing or the dimensions of the castor you are replacing and we confirm the match. Quote within 1 to 2 working days.

Specifications from the LIV product database, October 2026.