
Heavy duty wheel 250 mm, polyurethane, ball bearing, axle hole 20 mm, 800 kg, Art. 2-120-50K

Heavy duty wheel with a 250 mm wheel, polyurethane tread, on ball bearing. It carries 800 kg dynamic and 1000 kg static, with a 20 mm axle hole.

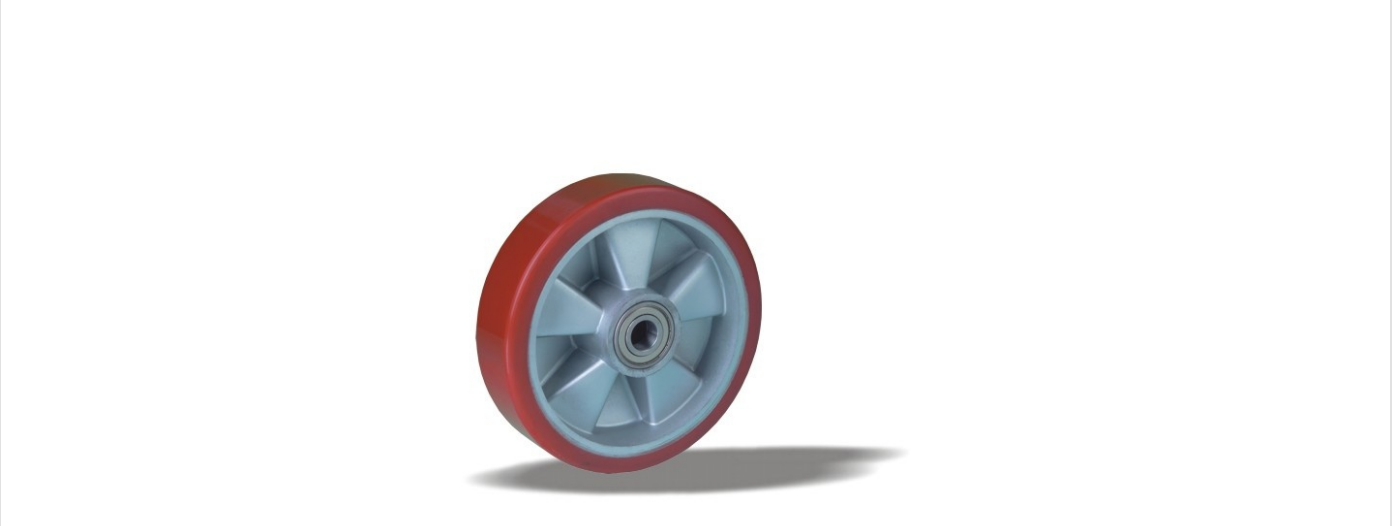

Drawing number **2-120-50K** | SKU **46779** | EAN **3838461467790**

Type	Heavy duty wheel
Wheel diameter	250 mm
Wheel width	50 mm
Tread	polyurethane tread, 92 Shore A
Tread colour	orange/red/brown
Wheel centre	aluminium
Bearing	ball bearing
Load capacity, dynamic	800 kg
Load capacity, static	1000 kg
Axle hole	20 mm
Temperature, continuous	-25 to +55 °C
Temperature, short exposure (max. 10 min)	-40 to +55 °C
Fitting	Wheel hub
Hub length	60 mm
Tread material	Injection-moulded polyurethane

Properties and use

Low own weight and chemical resistance. Heavy loads move with little effort. On request: other wheel and tyre colours, and an electrically conductive or antistatic tyre (ESD).

Send us the drawing or the dimensions of the castor you are replacing and we confirm the match. Quote within 1 to 2 working days.

Specifications from the LIV product database, October 2026.