
Heavy duty swivel castor 125 mm, polyurethane, ball bearing, plate 135x110 mm, 500 kg, Art. 2-152-25K

Heavy duty swivel castor, 125 mm wheel diameter, polyurethane tread, running on ball bearing. Rated load is 300 kg dynamic, 600 kg static, mounted on a 135x110 mm top plate with hole distance 110x85 mm.

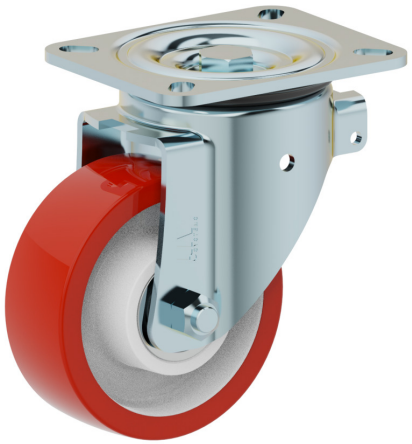

Drawing number **2-152-25K** | SKU **48295** | EAN **3838461482953**

Type	Heavy duty swivel castor
Wheel diameter	125 mm
Wheel width	45 mm
Tread	polyurethane tread, 92 Shore A
Tread colour	orange/red/brown
Wheel centre	aluminium
Bearing	ball bearing
Load capacity, dynamic	300 kg
Load capacity, static	600 kg
Top plate	135x110 mm
Hole distance	110x85 mm
Fixing hole diameter	9 mm
Overall height	169 mm
Temperature, continuous	-25 to +55 °C
Temperature, short exposure (max. 10 min)	-40 to +55 °C
Load capacity at 4 km/h	500 kg
Tread material	Injection-moulded polyurethane

Fork zinc electroplated and Cr(VI)-free.

Properties and use

Low own weight and chemical resistance. Heavy loads move with little effort. On request: other wheel and tyre colours, and an electrically conductive or antistatic tyre (ESD).

Send us the drawing or the dimensions of the castor you are replacing and we confirm the match. Quote within 1 to 2 working days.

Specifications from the LIV product database, October 2026.