
Heavy duty swivel castor with total lock 125 mm, polyurethane, ball bearing, plate 135x110 mm, 500 kg, product code 48296

Heavy duty swivel castor with total lock with polyurethane tread, wheel diameter 125 mm, on ball bearing. It carries 300 kg dynamic and 570 kg static, mounted on a 135x110 mm top plate with hole distance 110x80 mm. The total lock brakes the rotation of the wheel and the swivel head.

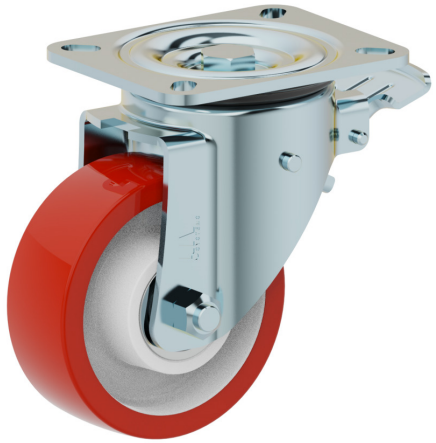

Drawing number **2-153-25K** | Product code **48296** | EAN **3838461482960**

Type	Heavy duty swivel castor with total lock
Wheel diameter	125 mm
Wheel width	60 mm
Tread	polyurethane tread, 92 Shore A
Tread colour	orange/red/brown
Wheel centre	aluminium
Bearing	ball bearing
Load capacity, dynamic	300 kg
Load capacity, static	570 kg
Top plate	135x110 mm
Hole distance	110x80 mm
Fixing hole diameter	9 mm
Overall height	170 mm
Brake	total lock (locks wheel and swivel)
Temperature, continuous	-25 to +55 °C
Temperature, short exposure (max. 10 min)	-40 to +55 °C
Load capacity at 4 km/h	500 kg
Tread material	Injection-moulded polyurethane

Fork zinc electroplated and Cr(VI)-free.

Properties and use

Low own weight and chemical resistance. Heavy loads move with little effort. On request: other wheel and tyre colours, and an electrically conductive or antistatic tyre (ESD).

Send us the drawing or the dimensions of the castor you are replacing and we confirm the match. Quote within 1 to 2 working days.

Specifications from the LIV product database, October 2026.