
Swivel transport castor 225 mm, black rubber, roller bearing, plate 175x140 mm, 250 kg, product code 55393

Swivel transport castor, 225 mm wheel diameter, black rubber tread, running on roller bearing. Rated load is 250 kg dynamic, 310 kg static, mounted on a 175x140 mm top plate with hole distance 140x105 mm.



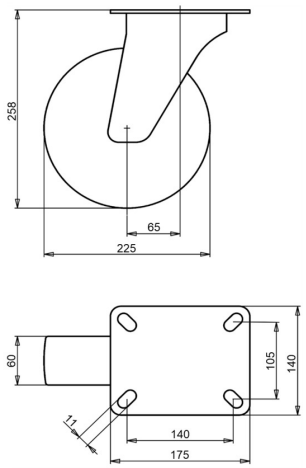

Drawing number **2-311 ISO** | Product code **55393** | EAN **3838461553936**

Type	Swivel transport castor
Wheel diameter	225 mm
Wheel width	60 mm
Tread	black rubber tread, 80 Shore A
Tread colour	black
Wheel centre	steel, zinc electroplated, Cr(VI)-free
Bearing	roller bearing
Load capacity, dynamic	250 kg
Load capacity, static	310 kg
Top plate	175x140 mm
Hole distance	140x105 mm
Fixing hole diameter	11 mm
Overall height	258 mm
Offset	65 mm
Weight	4.9 kg
Temperature, continuous	-20 to +70 °C
Temperature, short exposure (max. 10 min)	-30 to +80 °C

Fork zinc electroplated and Cr(VI)-free. Tread free of PAH (EU directive 2005/69/EC). Tested to EN 12532.

Properties and use

Steers easily and copes with uneven floors and obstacles. Steel rim and rubber tyre make a strong wheel. On request: other wheel and tyre colours, and an electrically conductive or antistatic tyre (ESD).

Send us the drawing or the dimensions of the castor you are replacing and we confirm the match. Quote within 1 to 2 working days.

Specifications from the LIV product database, October 2026.