
# Swivel transport castor 250 mm, black rubber, roller bearing, plate 175x140 mm, 300 kg, product code 62952

Swivel transport castor with a 250 mm wheel, black rubber tread, on roller bearing. It carries 300 kg dynamic and 370 kg static, mounted on a 175x140 mm top plate with hole distance 140x105 mm.



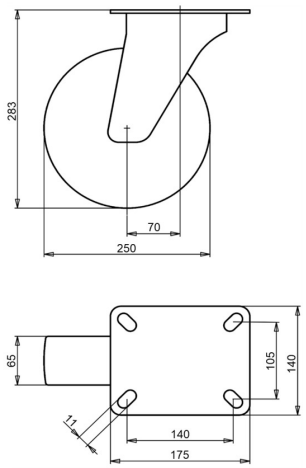


Drawing number **2-506 ISO** | Product code **62952** | EAN **3838461629525**

| | |
|---|---|
| **Type** | Swivel transport castor |
| **Wheel diameter** | 250 mm |
| **Wheel width** | 65 mm |
| **Tread** | black rubber tread, 80 Shore A |
| **Tread colour** | black |
| **Wheel centre** | steel, zinc electroplated, Cr(VI)-free |
| **Bearing** | roller bearing |
| **Load capacity, dynamic** | 300 kg |
| **Load capacity, static** | 370 kg |
| **Top plate** | 175x140 mm |
| **Hole distance** | 140x105 mm |
| **Fixing hole diameter** | 11 mm |
| **Overall height** | 283 mm |
| **Offset** | 70 mm |
| **Weight** | 5.7 kg |
| **Temperature, continuous** | -20 to +70 °C |
| **Temperature, short exposure (max. 10 min)** | -30 to +80 °C |

Fork zinc electroplated and Cr(VI)-free. Tread free of PAH (EU directive 2005/69/EC). Tested to EN 12532.

## Properties and use

Steers easily and copes with uneven floors and obstacles. Steel rim and rubber tyre make a strong wheel. On request: other wheel and tyre colours, and an electrically conductive or antistatic tyre (ESD).

Send us the drawing or the dimensions of the castor you are replacing and we confirm the match. Quote within 1 to 2 working days.

Specifications from the LIV product database, October 2026.