# Fixed castor 100 mm, polypropylene, roller bearing, plate 105x85 mm, 125 kg, product code 32484, wheel centre black

Fixed castor with a 100 mm wheel, solid polypropylene wheel, on roller bearing. It carries 125 kg dynamic and 150 kg static, mounted on a 105x85 mm top plate with hole distance 80x60 mm.



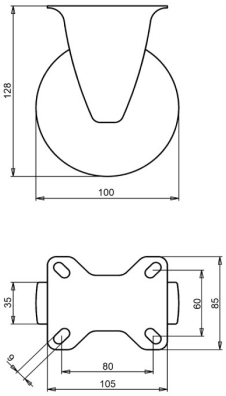


Drawing number **2-666 A** | Product code **32484** | EAN **3838461324840**

| | |
|---|---|
| **Type** | Fixed castor |
| **Wheel diameter** | 100 mm |
| **Wheel width** | 35 mm |
| **Tread** | solid polypropylene wheel, 60±5 Shore D |
| **Wheel centre** | polypropylene |
| **Bearing** | roller bearing |
| **Load capacity, dynamic** | 125 kg |
| **Load capacity, static** | 150 kg |
| **Top plate** | 105x85 mm |
| **Hole distance** | 80x60 mm |
| **Fixing hole diameter** | 9 mm |
| **Overall height** | 128 mm |
| **Weight** | 0.55 kg |
| **Temperature, continuous** | -20 to +60 °C |
| **Tread hardness** | 60 Shore D |

Fork zinc electroplated and Cr(VI)-free.

## Properties and use

Polypropylene resists acids, wears slowly and rolls with low resistance. On request: other wheel and tyre colours, and an electrically conductive or antistatic tyre (ESD).

Send us the drawing or the dimensions of the castor you are replacing and we confirm the match. Quote within 1 to 2 working days.

Specifications from the LIV product database, October 2026.