
Waste container swivel castor with total lock 200 mm, black rubber, roller bearing, plate 135x108 mm, 350 kg, steel rim, product code 47121

Waste container swivel castor with total lock with a 200 mm wheel, black rubber tread, on roller bearing. It carries 350 kg dynamic and 410 kg static, mounted on a 135x108 mm top plate with hole distance 105x80 mm. The total lock brakes the rotation of the wheel and the swivel head.



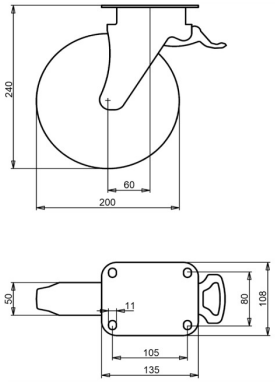

Drawing number **2-020-Z14** | Product code **47121** | EAN **3838461471216**

Type	Waste container swivel castor with total lock
Wheel diameter	200 mm
Wheel width	50 mm
Tread	black rubber tread, 80 Shore A
Tread colour	black
Wheel centre	steel, zinc electroplated, Cr(VI)-free
Bearing	roller bearing
Load capacity, dynamic	350 kg
Load capacity, static	410 kg
Top plate	135x108 mm
Hole distance	105x80 mm
Fixing hole diameter	11 mm
Overall height	240 mm
Offset	60 mm
Brake	total lock (locks wheel and swivel)
Directional lock	optional
Temperature, continuous	-20 to +70 °C
Temperature, short exposure (max. 10 min)	-30 to +80 °C

Fork zinc electroplated and Cr(VI)-free.

Properties and use

For changing weather and rough handling, with a long service life. On request: other wheel and tyre colours, and an electrically conductive or antistatic tyre (ESD).

Send us the drawing or the dimensions of the castor you are replacing and we confirm the match. Quote within 1 to 2 working days.

Specifications from the LIV product database, October 2026.