Heavy duty fixed castor 200 mm, polyurethane, ball bearing, plate 140x118 mm, 1000 kg, product code 61004

Heavy duty fixed castor with polyurethane tread, wheel diameter 200 mm, on ball bearing. It carries 1000 kg dynamic and 1250 kg static, mounted on a 140x118 mm top plate with hole distance 105x80 mm.



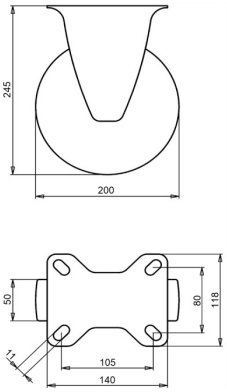

Drawing number **2-330 ISO** | Product code **61004** | EAN **3838461610042**

Type	Heavy duty fixed castor
Wheel diameter	200 mm
Wheel width	50 mm
Tread	polyurethane tread, 92 Shore A
Tread colour	orange/red/brown
Wheel centre	cast iron
Bearing	ball bearing
Load capacity, dynamic	1000 kg
Load capacity, static	1250 kg
Top plate	140x118 mm
Hole distance	105x80 mm
Fixing hole diameter	11 mm
Overall height	245 mm
Weight	5.7 kg
Temperature, continuous	-20 to +70 °C
Temperature, short exposure (max. 10 min)	-30 to +80 °C
Tread material	Injection-moulded polyurethane
Directional lock	Optional

Properties and use

Keeps its shape when the unit stands still, is easy to push and suits grainy floors. On request: other wheel and tyre colours, and an electrically conductive or antistatic tyre (ESD).

Send us the drawing or the dimensions of the castor you are replacing and we confirm the match. Quote within 1 to 2 working days.

Specifications from the LIV product database, October 2026.